



FLIR T1K

HD Thermal Imaging Camera

Get ready for outstanding thermal infrared performance, built on 50 years of experience. With its remarkable range, up to 3.1 MP in resolution, and customization to fit your needs, the T1K is designed to be the ultimate tool to streamline your workday.

For the sharpest images, the truest temperatures, the most flexibility – the T1K is the ultimate result of five decades of infrared expertise.

Exceptional Measurement Performance

When you need the most accurate temperature measurements, from wide angle to telephoto

- The FLIR OSX™ Precision HDIR optical system lets you take accurate measurements from 2x as far away
- Continuous autofocus mode keeps pace with your movements
- Advanced OSX optical system ensures accurate measurements in extreme conditions
- Unique optical path eliminates error from heat sources outside the field of view

Outstanding Image Clarity

An extraordinarily sensitive detector, enhanced by the processing power of UltraMax™

- 1024 x 768 detector offers the best resolution of any FLIR hand-held camera
- Exceptional thermal sensitivity of < 0.02°C at +30°C, 2x better than the industry standard
- UltraMax™ super-resolution quadruples the pixel count up to 3.1 MP, for finer detail and accuracy
- MSX® embosses visual details on the thermal image


Features and User Interface Designed for the Expert

Compact design, responsive user interface, and instant report generation make your workday easier and more productive


- Programmable buttons allow you to configure the camera to fit your work flow
- Dynamic focus control adjusts to your touch so you can dial in images perfectly
- Radiometric recording captures full resolution, full-frame video for comprehensive analysis
- One-click Rapid Report™ generation lets you share images and findings fast



Overheating substation circuit breaker

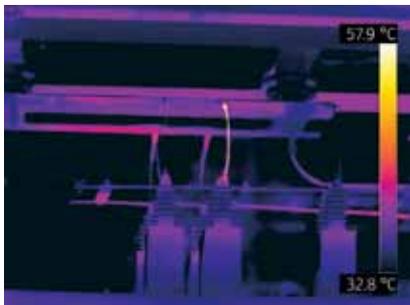

Hot power line transformer

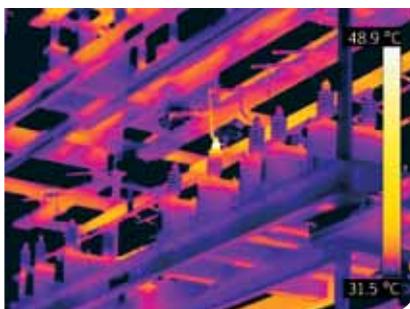

Failing transformer coil against a cold sky

Specifications

Model Numbers		FLIR T1040	
Imaging and Optical Data			
IR Sensor	1024 × 768 (786,432 measurement pixels)		
Thermal Sensitivity/NETD	< 0.02°C at +30°C		
Lens Choices	12°, 28°, 45°, 3x Close-up		
Minimum Focus Distance	0.2m (0.66 ft.) to 0.8m (2.13 ft.), depending upon the lens		
Image Frequency	30 Hz		
Spectral Range	7.5 - 14 μm		
4.3" Display	800 x 480 pixels		
Auto Orientation	Yes		
Touch Screen	Yes		
Image Presentation Modes			
Thermal Image	Yes		
Visual Image	Yes		
UltraMax™	Unique super-resolution process quadruples pixel count, up to 3.1 MP		
MSX®	Embosses visual details on full resolution thermal image, for clear text and location identification		
Gallery	Yes		
Measurement			
Temperature range	-40 to +2000°C		
Accuracy	±1°C (±1.8°F) or ±1% @25°C for temperatures between 5°C to 150°C ±2°C (±3.6°F) or ±2% of reading @ 25°C for temperatures up to 1200°C		
Measurement Analysis			
Measurement Tools	10 spotmeters, 5+5 areas (boxes, circles) with min./max./average		
Emissivity Correction	Variable from 0.01 to 1.0 or selected from materials list		
Measurements Correction	Emissivity, reflected temperature, relative humidity, atmospheric temperature, object distance, external IR window compensation		
Color Palettes	Iron, Rainbow, Rainbow HC, White Hot, Black Hot, Arctic, Lava		
Storage of Media			
Storage Media	Removable SD card (Class 10)		
Image File Format	Standard JPEG, including digital photo and measurement data		
Video Recording/Streaming			
Radiometric IR-Video Recording	Real-time radiometric recording to SD card		
Non-Radiometric IR-Video Recording	H.264 to SD card		
Radiometric IR-Video Streaming	Real-time radiometric streaming via USB		
Non-Radiometric IR-Video Streaming	H.264 video using Wi-Fi or USB		
Digital Camera			
Digital Camera	FOV adapts to the IR lens		
Video Lamp	Built-in LED light		
Additional Information			
USB, Connector Type	USB Micro-AB Data transfer to and from PC/Uncompressed colorized video		
Battery	Rechargeable Li-ion polymer battery		
Battery Operating Time	> 2.5 hours at 25°C (+68°F)		
Charging System	In camera (AC adapter or 12 V from a vehicle) or 2-bay charger		
Charging Time	2.5 hours to 90% capacity		
External Power Operation	AC adapter, 90-260 VAC input, 50/60 Hz or 12 V output from a vehicle (cable with standard plug, optional)		
Power Management	Automatic power-off functionality, user-configurable		
Storage Temp. Range	-40°C to +70°C (-40°F to 158°F)		
Weight	1.9 kg (4.3 lb.) to 2.1 kg (4.6 lb.), depending upon lens model		
Tripod Mounting	UNC ¼"-20		
System Includes:			
Infrared camera with lens	Hard transport case	Power supply, including multi-plugs	User documentation on CD-ROM
Battery (2 each)	Large eyecup	USB cable, Standard A to Micro-B	Printed documentation
Battery charger	Lens cap	Calibration certificate	Bluetooth headset
HDMI-HDMI cable	Neck strap	FLIR Tools+ license card	SD card

Equipment described herein may require US Government authorization for export purposes. Diversion contrary to US law is prohibited. Imagery for illustration purposes only. Specifications are subject to change without notice. ©2015 FLIR Systems, Inc. All rights reserved. B/2015



- 2 Years on camera parts and labor
- 5 Years on Li-Ion batteries
- 10 Years on the IR detector

For registration, visit www.flir.com/warranty/ins/

PORTLAND

Corporate Headquarters
FLIR Systems, Inc.
27700 SW Parkway Ave.
Wilsonville, OR 97070
USA
PH: +1 866.477.3687

FLIR Systems Co. Ltd.
Room 1613 -16, Tower 2,
Grand Central Plaza,
No. 138 Shatin Rural
Committee Road,
Shatin, New Territories,
Hong Kong
Tel: +852 2792 8955
Fax: +852 2792 8952
Email: flir@flir.com.hk

FLIR Systems Australia Pty Ltd
10 Business Park Drive
Notting Hill Vic 3168,
Australia
Phone: 1300 729 987
(NZ: 0800 785 492)
Fax: +61 (0)3 9558 9853
E-mail: info@flir.com.au

FLIR Systems India Pvt Ltd.
1111, D-Mall,
Netaji Subhash Place,
Pitampura,
New Delhi - 110034
Tel: +91-11-45603555
Fax: +91-11-47212006
E MAIL: flirindia@flir.com.hk

FLIR Systems (Shanghai) Co., Ltd.
Tel: +86-21-5169 7628
E-mail: info@flir.cn

FLIR Systems Japan K.K.
Tel: +81-3-6271-6648
Email: info@flir.jp

FLIR Systems Korea Co., Ltd
Tel: +81-3-6271-6648
Email: info@flir.jp

FLIR Systems Taiwan Representative Office
Tel: +886 2 2757 9662
Fax: +886 2 2757 6723
E-mail: flir@flir.com.hk

www.flir.com
NASDAQ: FLIR